



Republic of the Philippines
UNIVERSITY OF RIZAL SYSTEM
Province of Rizal

Cp No. (63)918-9519618
urs.bacsecretariat2020@gmail.com

Date : MAY 24, 2024

Company/Supplier Name : _____

Address : _____

Please quote your lowest price on the item/s listed below, subject to the General Conditions on the last page, stating the shortest time of delivery and submit your sealed quotation duly signed by your representative not later than 5/29/24 to URS SPMO, Morong Rizal.

ARIEL M. PLANTILLA, DBA
Chairperson, BAC

- NOTE: 1. ALL ENTRIES MUST BE TYPEWRITTEN
2. DELIVERY PERIOD WITHIN 15 CALENDAR DAYS
3. WARRANTY SHALL BE FOR A PERIOD OF SIX (6) MONTHS FOR SUPPLIES & MATERIALS, ONE (1) YEAR FOR EQUIPMENT, FROM DATE OF ACCEPTANCE BY THE ENTITY
4. PRICE VALIDITY SHALL BE FOR A PERIOD OF 45 CALENDAR DAYS
5. G-EPS REGISTRATION CERTIFICATE SHALL BE ATTACHED UPON SUBMISSION OF THE QUOTATION
6. BIDDERS SHALL SUBMIT ORIGINAL BROCHURES SHOWING CERTIFICATIONS OF THE PRODUCT BEING OFFERED

ITEM NO.	ITEM & DESCRIPTION	QTY.	UNIT	BID PRICE	TOTAL BID PRICE
1	REPAIR AND IMPROVEMENT OF EULOGIO AMANG RODRIGUEZ TANGHALANG SINING (EARTS) STAGE Replacement of Busted Light on Stage, Backstage and Dressing Rooms Replacement of Dilapidated Stage Carpet Repair of Stage, Backstage and Dressing Rooms	1	lot(s)		
	nothing follows				
	(SEE ATTACHED FOR DETAILS)				
	ABC - Php 143,387.27				
	-				

Brand and Model : _____
Warranty : _____

Delivery Period : _____
Price Validity : _____

After having carefully read and accepted your General Condition, I/We quote you on the items at prices noted above.

CERTIFICATION

I hereby certify that I have personally conducted this canvass and that the price(s) quoted is/are true & correct and the signature of the representative of the company who submitted the quotation(s) is/are genuine.

JULIANNE I. APAREJADO
Procurement Officer

Printed Name & Signature of Authorized Canvasser

Printed Name / Signature

Tel. No. / Cell phone No.

E-mail address

Date

Tin Number

URS-AF-AS-PRO-F-2017-02

Rev. 00

Effectivity Date August 15, 2017

Modified version of RFQ form from
(SF-GOOD-60, May 2004)

PR No. 2024-05-0453
RFQ No. 2024-05-0192

Repair and Improvement of EARTS Stage


- POSTED TO PHILGORS


DETAILED ESTIMATES
(Construction / General Repair by Administration)

Project Name: Replacement of Busted Lights
 Campus/Department/Unit/
 Office/College: University of Rizal System - Morong (EARTS)

Supplier/Contractor: n/a Project Duration: 3 Days

MATERIALS						
ITEM	DESCRIPTION	QUANTITY	UNIT	ESTIMATED UNIT PRICE	TOTAL AMOUNT	REMARKS
	Electrical					
1	LED Bulb Daylight	11	Pc.			
	Features:					
	● Up to 85% energy savings					
	● 9 watts					
	● High colour rendering index					
	● Mercury free					
	● Less heat emission					
	● 20,000 hours of operation					
2	LED Par Lamp E27 Base - Warm White	5	Pc.			
	Features:					
	● Up to 85% energy savings					
	● 15 watts					
	● Mercury free					
	● Higher light intensity of up to 15 meters					
	● 30 Degrees beam angle					
	● Lightweight					
● 20,000 hours of operation						
Grand Total						
L						
NO. OF PERSONNEL	DESCRIPTION	RATE	NO. OF HRS/DAYS	LABOR COST	START	PERIOD END

Prepared by: 
 RJAY M. MACARULAY
 Administrative Assistant II

Approved by: 
 JOHN ANDREW G. FRANCISCO
 University Head of General Services

DETAILED ESTIMATES
(Construction / General Repair by Administration)

Project Name: Repair and Repainting
 Campus/Department/Unit/
 Office/College: University of Rizal System - Morong (EARTS)
 Supplier/Contractor: n/a Project Duration: 10 Days

MATERIALS					
ITEM	DESCRIPTION	QUANTITY	UNIT	ESTIMATED UNIT PRICE	TOTAL AMOUNT
	Backdrop (Front and Backstage)				
1	Paint 16L Type: Latex Finish: Semi-Gloss Color: White	1	Pail		
2	Paint 4L Type: Latex Finish: Flat Color: White	3	Gal.		
3	Perforated Tape	4	Pc.		
4	Plasolux Glazing Putty 4L	1	Gal.		
5	Lacquer Thinner 4L	1	Pc.		
6	Fiber Cement Board Size: 6mm x 4ft x 8ft	10	Pc.		
7	Local Marine Plywood Size: 3/4" x 4ft x 8ft.	1	Pc.		
8	Acreex Rubberized Floor Coating 4L Color: Crystal Blue	3	Gal.		
9	Acreex Reducer 4L	1	Gal.		
				Sub - Total	
	Backdrop (Left Side)				
10	Paint 4L Type: QDE Finish: Semi-Gloss Color: Royal Blue	2	Gal.		
11	Paint Thinner 1L	2	Pc.		
				Sub - Total	
	Backdrop (Right Side)				
12	Paint 4L Type: QDE Finish: Semi-Gloss Color: Royal Blue	2	Gal.		

	Post Beam (Left & Right Side)				Sub - Total	1,976.85
13	Acry Color Paint 1L Color: Blue	1	Pc.			
14	Acry Color Paint 1L Color: Red	1	Pc.			
15	Acry Color Paint 1L Color: Green	1	Pc.			
	Tools and Other Materials				Sub - Total	
16	Paint Roller Size: 7"	10	Pc.			
17	Paint Roller Size: 4"	10	Pc.			
18	Paint Brush Size: 2"	6	Pc.			
19	Paint Roller Tray Size: 12"x14"	3	Pc.			
20	Blind Rivets 350pcs. Size: 1/8" x 1/2"	2	Box			
21	Metal Drill Bit Size: 5/32"	5	Pc.			
22	Paint Roller Extension Pole Size: 1.2m	2	Pc.			
23	Masking Tape Size: 1 1/2"	2	Pc.			
24	Gypsum Black Screw 1"	200	Pc.			
25	Type: Metal Sand Paper #180	10	Pc.			
	Dressing Room				Sub - Total	4
26	Paint 4L Type: Flat Wall Enamel Finish: Semi-Gloss Color: White	2	Gal.			
27	Paint 4L Type: Quick Drying Enamel Finish: Semi-Gloss Color: White	2	Pail			
28	Ordinary Plywood Size: 1/4" x 4 x 8ft.	6	Pc.			
29	Cylindrical Knobset Material: Stainless Steel	2	Pc.			

30	Common Nail 1"		1	Kg.				
31	Angle Valve Finish: Glossy Material: Stainless Steel Type: 2 way 1/2"x1/2"x1/2"		2	Pc.				
32	Angle Valve Finish: Satin Material: Stainless Steel Type: 1 way 1/2"x1/2"		1	Pc.				
33	Hand Bidet Set Matte Black Finish Material: ABS Material Type: Multi Setting (Water Spray, Feminine) Hose Length: 1.2m		2	Pc.				
34	Stainless Steel Flexible Hose Size: 1/2"x 1/2"x16"		3	Pc.				
35	Stainless P-Trap with Lavatory Strainer Size: 1 1/4"		4	Pc.				
36	Wet and Dry Water Stop Sealant Size: 200ml		2	Can				
				Sub - Total				
				Grand Total				
LABOR								
NO. OF PERSONNEL	DESCRIPTION	RATE	NO. OF HRS/DAYS	PERIOD	START	END		

Prepared by:

Ray M. Macarulay
RAY M. MACARULAY
Administrative Assistant II

Approved by:


John Andrew G. Francisco
JOHN ANDREW G. FRANCISCO
University Head of General Services


DETAILED ESTIMATES
(Construction / General Repair by Administration)

Project Name: Installation of New Carpet Roll at Earts Stage
 Campus/Department/Unit/
 Office/College: University of Rizal System - Morong (EARTS)

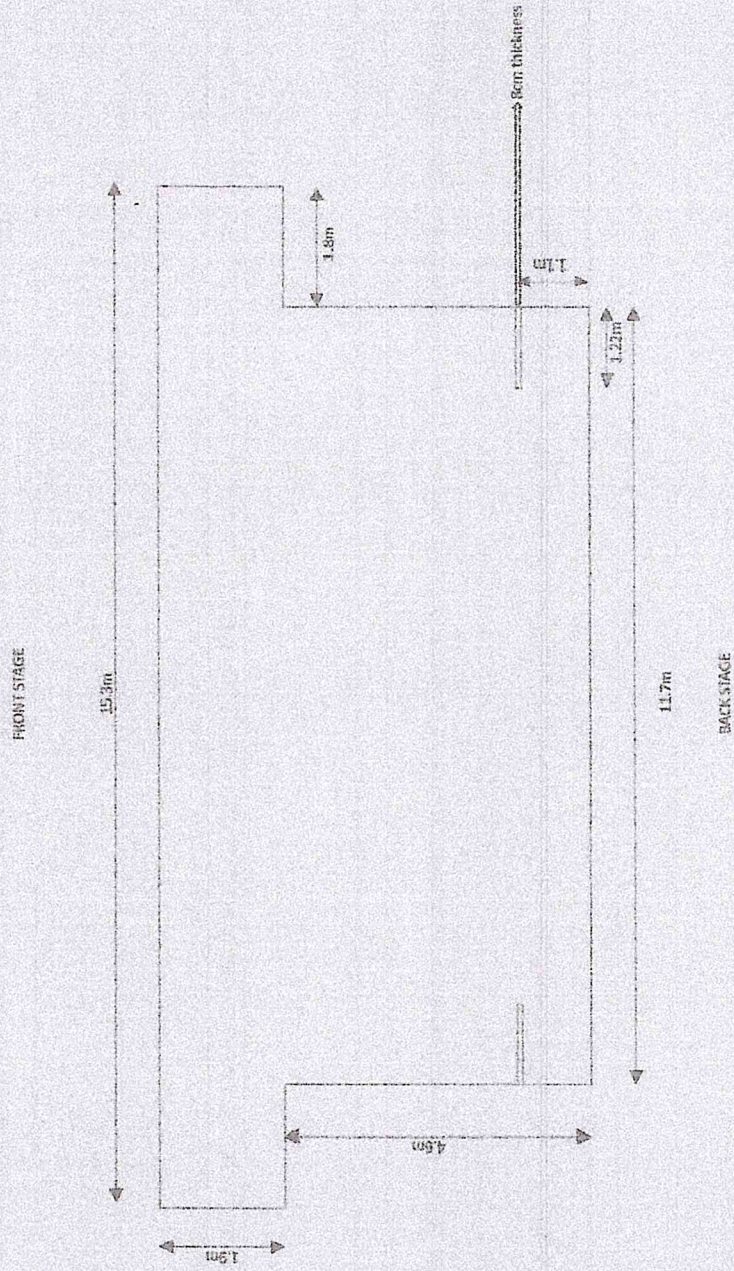
Supplier/Contractor _____ Project Duration: 2 Days

MATERIALS						
ITEM	DESCRIPTION	QUANTITY	UNIT	ESTIMATED UNIT PRICE	TOTAL AMOUNT	REMARKS
1	Carpet Roll Specifications: Type: Broadloom Color: Dark Gray Pile Material: 100% Olefin Pile Weight: 16oz Pile Height: 4mm Width: 3.66m	99.5	Sqm			
	Stage Dimensions Length: 15.3m Width: 6.5m Area:99.5 sqm					
	Stairs	6	Sqm			
	Other Inclusions: Installation and Underlay Foam					
	Delivery Charge					
2						
				Total		
LABOR						
NO. OF PERSONNEL	DESCRIPTION	RATE	NO. OF HRS/DAYS	LABOR COST	START	PERIOD
N/A	N/A	N/A	N/A	N/A	N/A	N/A
				</		

Prepared by: 
 RYAN M. MACARULAN
 Administrative Assistant II

Approved by: 
 JOHN ANDREW G. FRANCISCO
 University Head of General Services

EARTS STAGE DIMENSIONS



John Andrew G. Francisco
Prepared by: John Andrew G. Francisco
Head, University General Services